


MicroVideo


HDA 801/HDA 401

1 x 8 and 1 x 4 Distribution amp

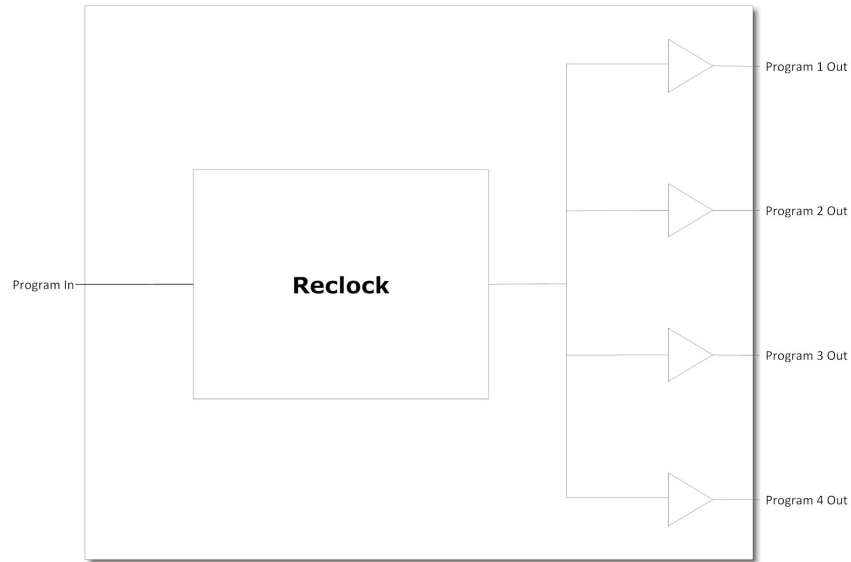

Features

1 x 8 and 1 x 4 distribution amplifiers providing 8 or 4 reclocked SD, HD or 3G outputs in a compact standalone unit.

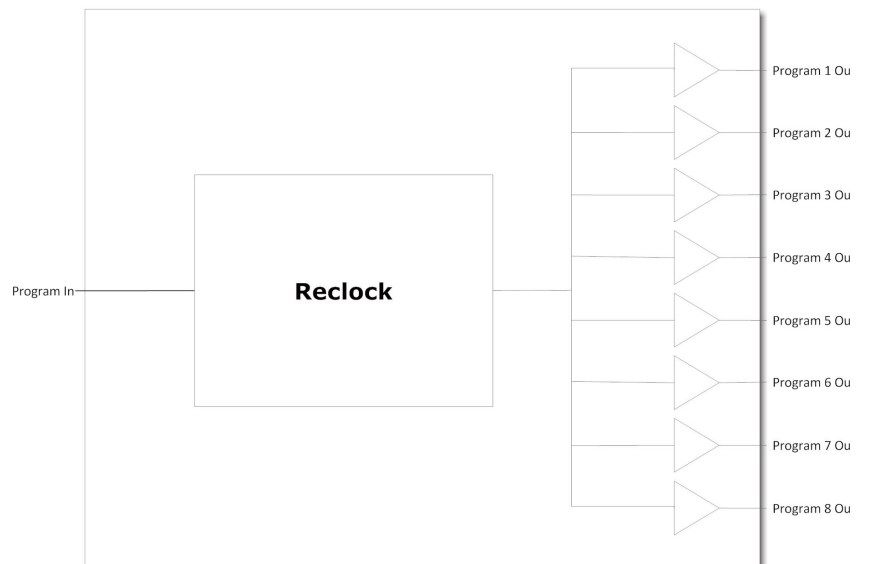

Specification

Input

SD/HD Serial Video Standard	SMPTE 424M (3Gb/s) SMPTE 292M (1.5Gb/s) SMPTE 259M (270Mb/s) 1080p/59.94, 1080i/59.94, 1080i/50, 720p/50
Number of Inputs	1
Equalization	Automatic to 75m @ 1.5Gb/s with Belden 1694A or equivalent cable.
Return Loss	> 10dB up to 1.5GHz

Output

HD Serial Video Standard	As per input
Number of Outputs	8 (4 for 4x1) reclocked

Miscellaneous


Weight Approx	175g
Operating Temp	0 °C to +50 °C
Dimensions	16 x 100 x 237 mm (HxWxD)
Electrical	Voltage +5Vdc

Rear Connections

Program 1 In
Program 2 In
Not Used
Aux Out
Aux Out
Program Out



Program 1 In
Program 2 In
Not Used
Aux Out
Aux Out
Program Out



Audio In

Audio Out